


# **IDAN-HPWR104plusHRTX-83WS**

## **DIMENSIONS AND PINOUT**

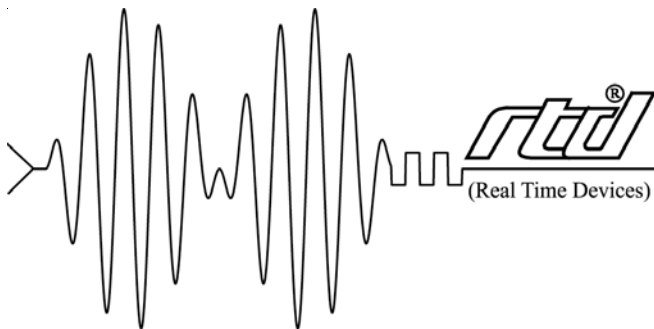

RTD Embedded Technologies, Inc.


*"Accessing the Analog World"®*

IDM-650020025  
REVA

# IDAN System Modules: Dimensions and Pinout

## IDAN-HPWR104plusHRTX-83WS

### Power Supply Module

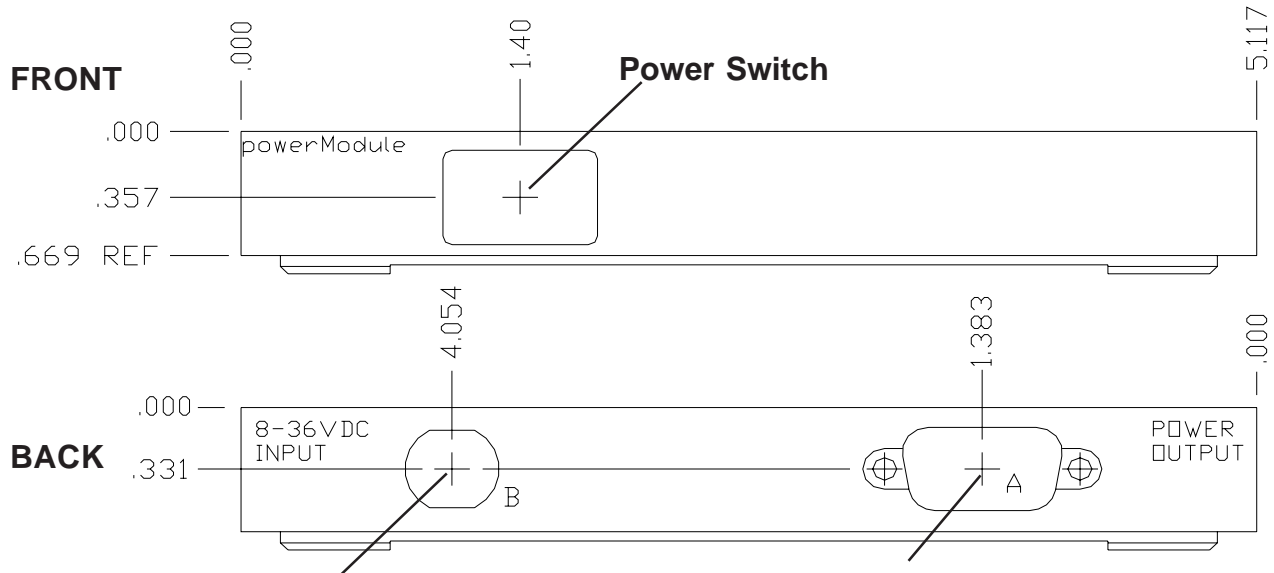


#### 2 pin Quick Disconnect: female

Module Part #: Lemo EEG.1B.302.CLL  
Mating Part #: Lemo FGG.1B.302.CLAD52Z

#### 9 pin "D": female

Module Part #: Adam Tech DE09SD  
Mating Part #: Adam Tech DE09PD

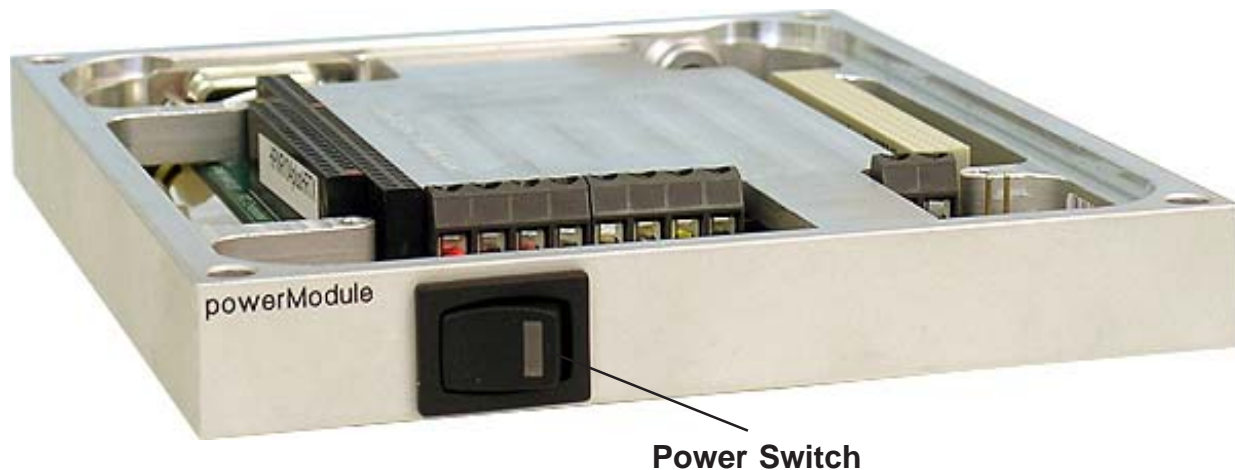

**Drawing not to scale.**

Copyright © 2005 by RTD Embedded Technologies, Inc.  
All rights reserved.



For additional information:


Phone: 1 (814) 234-8087 ■ Fax: 1 (814) 234-5218

www.rtd.com ■ E-mail: sales@rtd.com

**RTD Embedded Technologies, Inc.**

*"Accessing the Analog World"*

# IDAN System Modules: Dimensions and Pinout

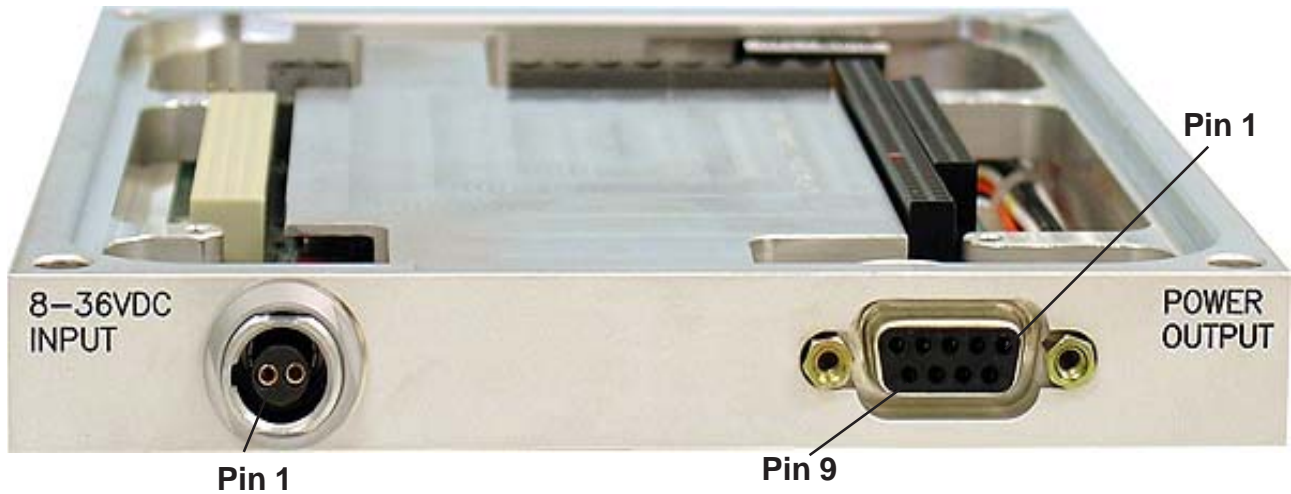

**NOTE: Do not make connections to reserved pins!!!**

Power Input - 2 Pin Quick Disconnect Connector (Female)	
IDAN Pin #	Signal
1	8 - 36 VDC
2	Ground

Power Output - 9 Pin "D" Connector (Female)	
IDAN Pin #	Signal
1	+5 Volts
2	Ground
3	+12 Volts
4	Ground
5	-12 Volts
6	+5 Volts
7	Ground
8	+3.3 Volts
9	Ground

Copyright © 2005 by RTD Embedded Technologies, Inc.  
All rights reserved.



For additional information:

Phone: 1 (814) 234-8087 ■ Fax: 1 (814) 234-5218

www.rtd.com ■ E-mail: sales@rtd.com

**RTD Embedded Technologies, Inc.**

*"Accessing the Analog World"*